



169 Corridor Coalition Presentation

SP 7001~103 TH 13

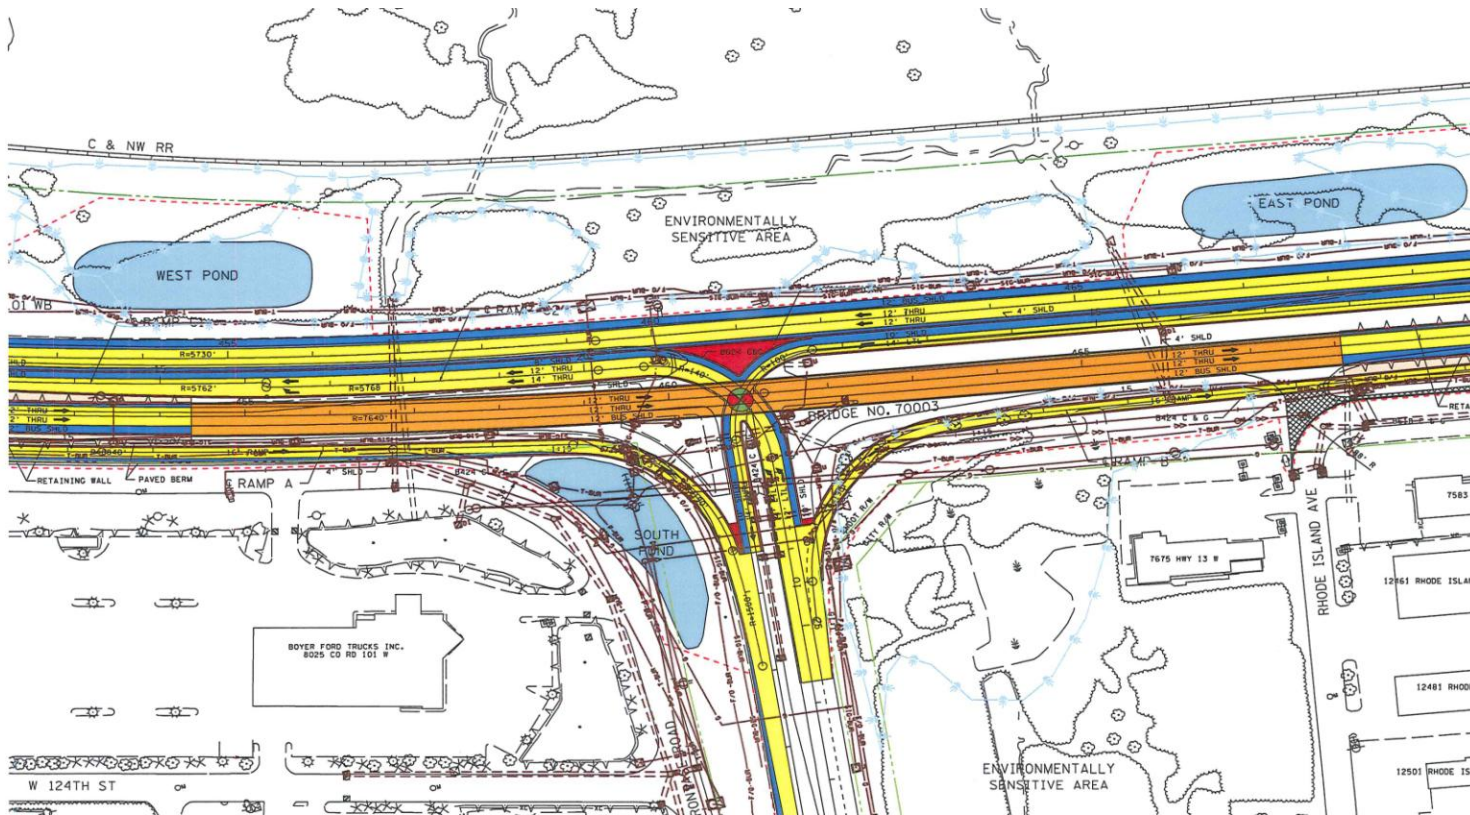

13 101



design-build



TH 13 Corridor Study, February 2000

- “The level of traffic along and adjacent to TH 13 has increased substantially in recent years with continued residential, commercial, and industrial development south of the Minnesota River and with the opening of the TH 169/Bloomington Ferry Bridge in the mid-1990’s.”
- “One of the many effects related to increased traffic volumes are increased accidents and other traffic safety issues.”
- “As a principal arterial, the design and operation of TH 13 is expected to favor mobility over access needs.”

Ports of Savage Feasibility Study, September 2002

- “Trunk Highway 13 carries the highest volume of truck traffic in Minnesota, and farmers and truckers find it difficult to negotiate the traffic to reach the Ports of Savage in a timely manner. TH 13 is unique in its combination of commuter traffic with truck access to a major national port.”



TH 13 South Frontage Road Improvements Feasibility Report, October 2004


- “This project is necessary to provide additional local access control along TH 13 in the downtown Savage area and help improve the overall traffic flow on TH 13 and access to the Ports of Savage.”

TH 169/TH 13 Stakeholders Workshop Report, December 2006

- “The high volume of through traffic on TH 13 and left-turns from northbound TH 13 to westbound (TH) 101 cause much of the congestion during the peak hours at the TH 13 intersection.”
- “Mn/DOT suggested full closure of the intersection at Zinran Avenue and (TH) 101...”

Federal Funding Award, January 2008



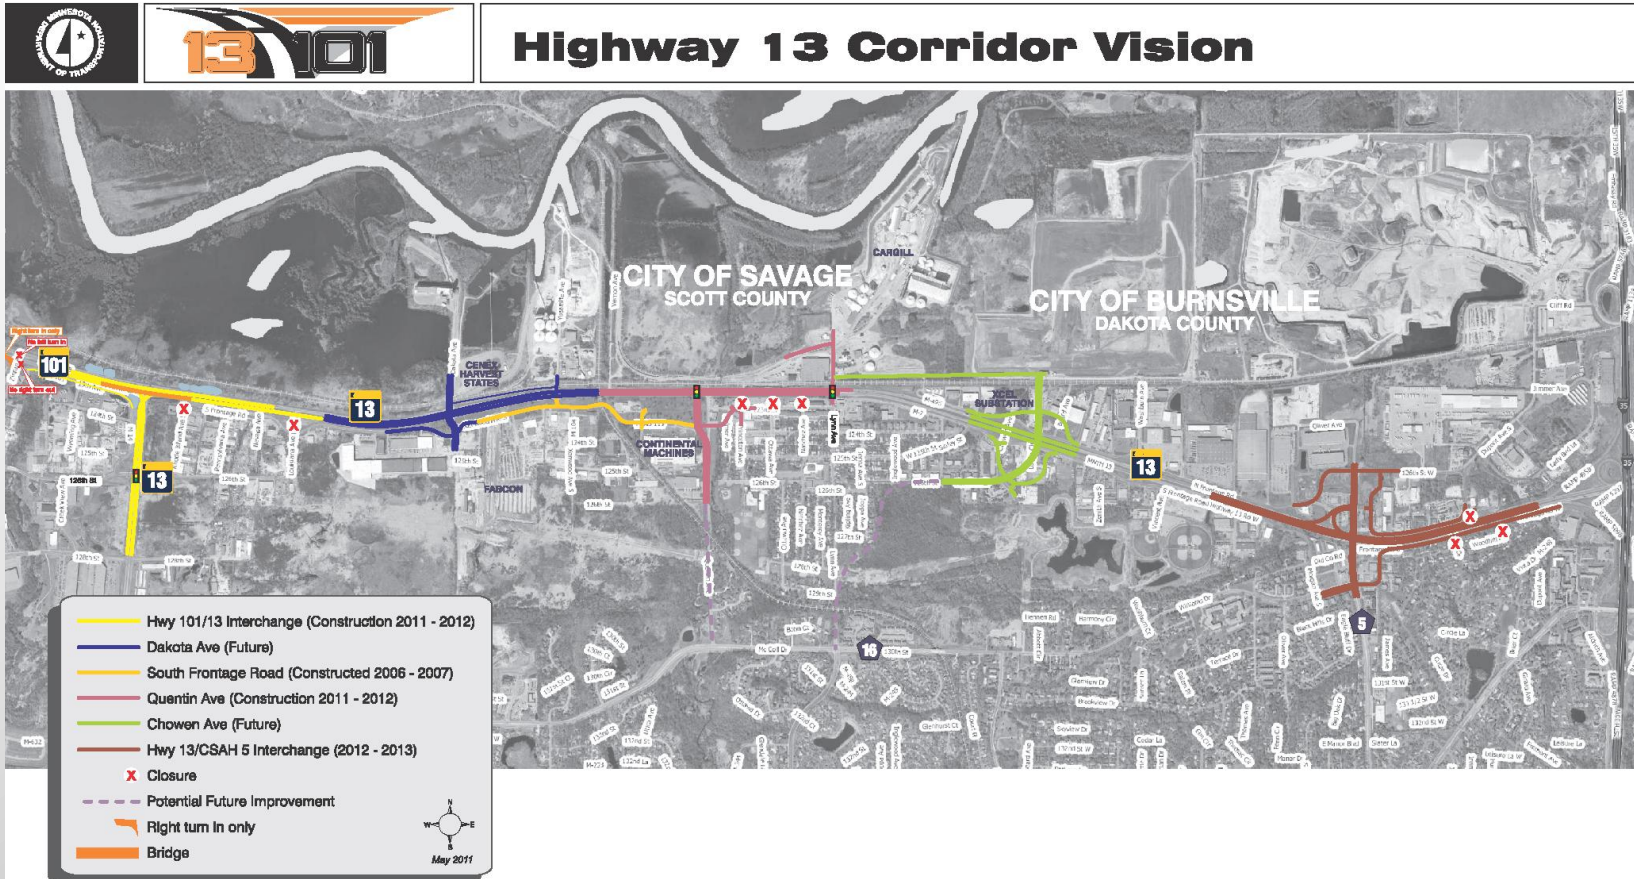

PROJECT BENEFITS

Safety

- The TH 13 and TH 101 intersection experiences on average around 30 crashes per year. It is anticipated that the project improvements will reduce number of crashes at the intersection by around 50%.
- The intersection of Hwy 13 and Hwy 101 was ranked #18 on the statewide-list of Top 200 Highest Crash Cost intersections (MnDOT crash data from 2005-2007). During this period the average annual crash cost was about \$1,300,000. Over 75% of these crashes were rear-end crashes, which are related to congestion and the signal at the intersection of Hwy 13 and Hwy 101.

Mobility

- Currently, the TH 13 and TH 101 intersection has a capacity of 4,400 vehicles per hour. The project will more than double the capacity of the intersection.



December 2009: Municipal Consent Granted

2/10/10: Staff Approved Layout

10/8/10: Best Value Bids Opened – All deemed unresponsive

1/28/10: Low Bid Bids Opened – \$19,037,000 Ames Construction, Inc

3/30/11: FHWA Concurrence and Project Award

4/5/11: Notice to Proceed 1 (NTP1)

5/27/11: NTP2



General Layout

Roadway

- Limits
- Free Flowing EB & WB
- EB 101 above 100 yr Flood
- Bus Shoulders
- Access Closures
 - Zinran Ave (Right In)
 - Rhode Island Ave
 - Louisiana Ave

Environmental


- Flood plain
- Artesian Condition
- Savage Fen
- Eagle Creek
- 3 Ponds

Right of Way

- No additional R/W


Bridge

- 1000 ft long

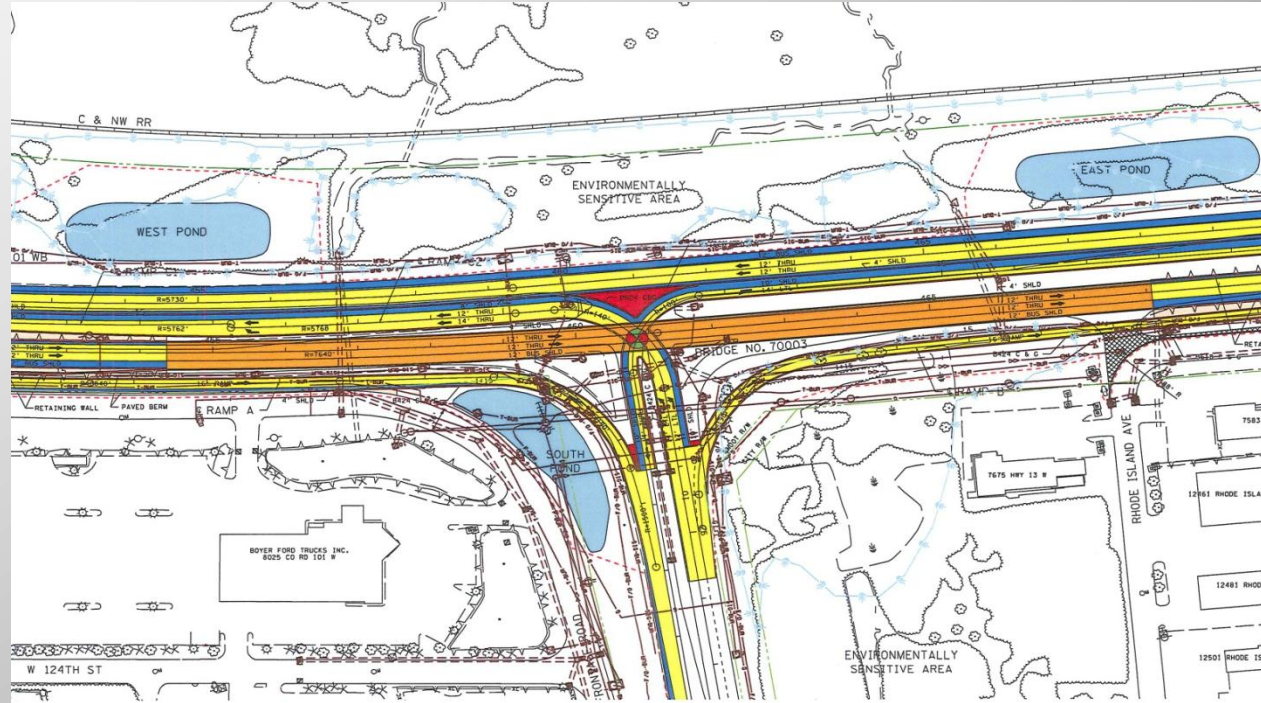

Lane Continuity Change

- Lane drop for EB 169 to EB 101.
- Lane add for SB 169 to EB 101.
- Improve merging and reduce congestion from backing up onto Bloomington Ferry Bridge during PM rush hour.
- High Benefit - Low Cost

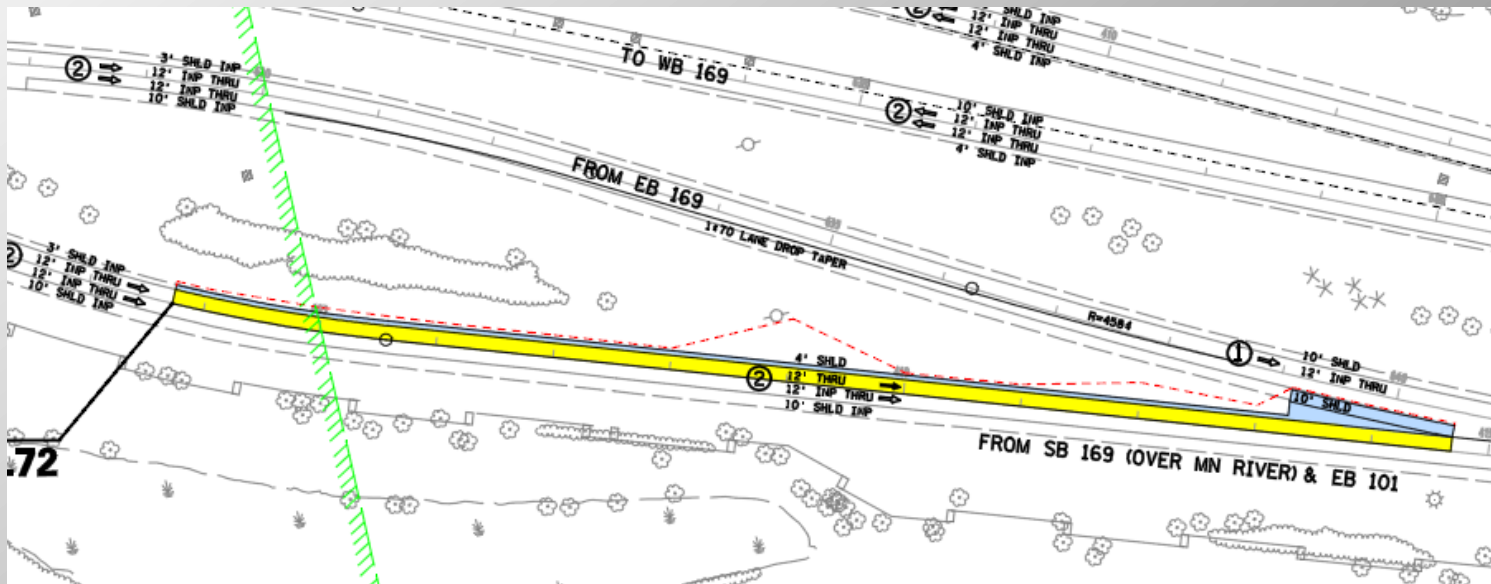

MAJOR MILESTONES

- Late July: Ramps C & D, WB 101 Completed
- Early August: EB 101 Shifted to WB 101, Bridge Construction Begins, EB 101 Construction Begins
- Early 2012: Bridge Completed
- Mid June: Substantial Completion

MAJOR TRAFFIC CHANGES

Activity	May	June	July	August	Sept	Oct	Nov	Dec	2012
Temporary Lane Closures - Hwy 13/101									
Hwy 13 Westbound lane closures to construct bus shoulder (7 days)									
Hwy 13 and Hwy 101 lane closures during non-restricted hours									
Temporary Closures									
Zinran Avenue intersection - closed for 21 days									
13th Avenue - closed for 60 days									
Three (3) Weekend Closures									
Hwy 13 South Leg									
Permanent Intersection Closures									
Hwy 101 Eastbound ramp from northbound Hwy 169 construction - permanent lane closure									
Louisiana Avenue Intersection with Hwy 13 - permanently closed									
Rhode Island with Hwy 13 - permanently closed									
Zinran right turn to Eastbound Hwy 13/101 - permanently closed									
Westbound Hwy 13/101 to Zinran left turn - permanently closed									
Hwy 101 Eastbound U-turn permanently closed									



Additional Information

Project Contacts

Liz Benjamin, Project Manager (952) 826-6705

Dale Gade, Design Manager/Construction Manager (651) 775-1581

J.P. Gillach, Public Affairs (651) 234-7503

Curt Kallio, Design-Build Program Manager (651) 366-4233

Project Website

<http://www.dot.state.mn.us/metro/projects/hwy13savage/index.html>

FAQs

<http://www.dot.state.mn.us/metro/projects/hwy13savage/faq.html>

Business Information

Via News Letter/Advisory Emails

